


**FRONT VIEW**

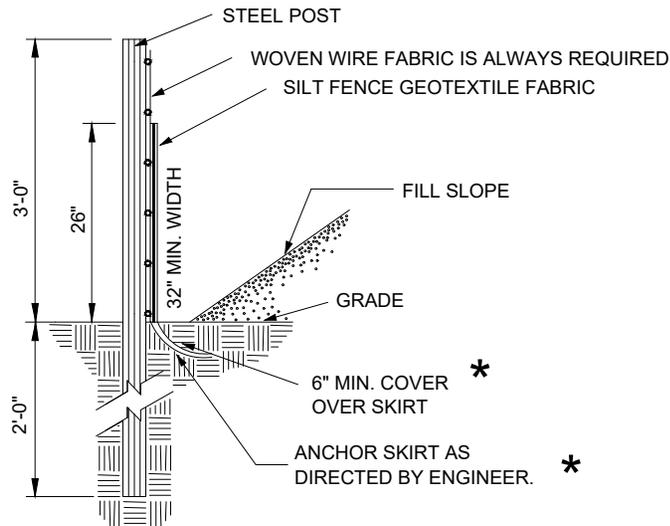


**SIDE VIEW**

**NOTES:**

1. END OF SILT FENCE SHOULD BE TURNED UPHILL
2. SEE N.C. STATE DEQ PRACTICE STANDARDS & SPECIFICATIONS SEDIMENT FENCE SET FOR CONDITIONS WHERE PRACTICE APPLIES; PLANNING CONSIDERATIONS & DESIGN CRITERIA. (HOWEVER FLOW SHALL NOT RUN PARALLEL WITH THE TOE OF THE FENCE).

\* FOR REPAIR OF SILT FENCE FAILURES, USE No. 57 WASHED STONE. FOR ANCHOR WHEN SILT FENCE IS PROTECTING CATCH BASIN. IN EACH CASE THE SILT FENCE IS TO BE PROPERLY ENTRENCHED & THE STONE SHALL BE AT A MINIMUM OF 16" ABOVE GRADE AT THE DIRECTION OF FLOW & BETWEEN 60 - 45 DEGREES.



**TOWN OF INDIAN TRAIL  
STANDARD DETAIL**

**STANDARD TEMPORARY SILT FENCE**

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	EC_17.01