MINIMUM DIMENSIONS FOR 90-DEGREE PARKING
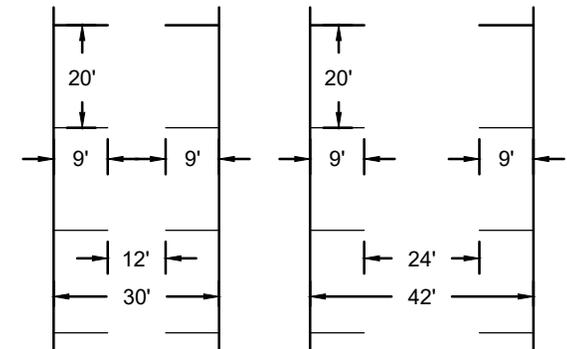
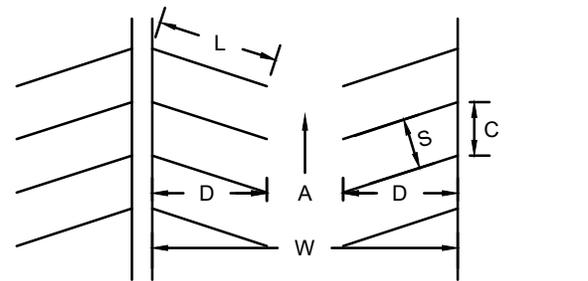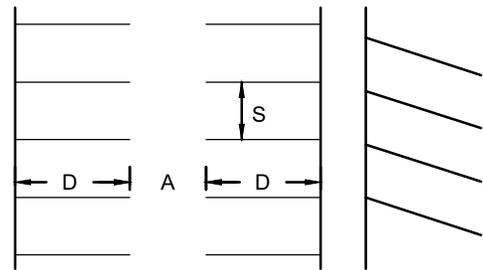| APPLICATION	(S) STALL WIDTH (feet)	(C) STALL LENGTH (feet)	(D) STALL DEPTH (feet)	(L) LINEAR DEPTH (feet)	(A) AISLE WIDTH 1-WAY/2-WAY (feet)	(W) MODULE WIDTH (feet)
	9	9	18	18	12/24	60

MINIMUM DIMENSIONS FOR 60-DEGREE PARKING

APPLICATION	(S) STALL WIDTH (feet)	(C) STALL LENGTH (feet)	(D) STALL DEPTH (feet)	(L) LINEAR DEPTH (feet)	(A) AISLE WIDTH 1-WAY/2-WAY (feet)	(W) MODULE WIDTH (feet)
	9	10.4	20.1	18	14.5/17	57

MINIMUM DIMENSIONS FOR 45-DEGREE PARKING

APPLICATION	(S) STALL WIDTH (feet)	(C) STALL LENGTH (feet)	(D) STALL DEPTH (feet)	(L) LINEAR DEPTH (feet)	(A) AISLE WIDTH 1-WAY/2-WAY (feet)	(W) MODULE WIDTH (feet)
	9	12.7	19.1	18	12/24	49.2

NOTE: PARKING DEPTH IS FROM FACE OF CURB

PROVIDE REQUIRED LANDSCAPING OF SPACING BETWEEN ABUTTING PARKING BAYS PER LANDSCAPE UDO

NOTE: C=S FOR 90 DEGREE PARKING
D=L FOR 90 DEGREE PARKING

TOWN OF INDIAN TRAIL
STANDARD DETAIL

PARKING LOT STALL DIMENSIONS

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	T_15.01