



CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

**TYPE N -1 (CURB TYPE)**

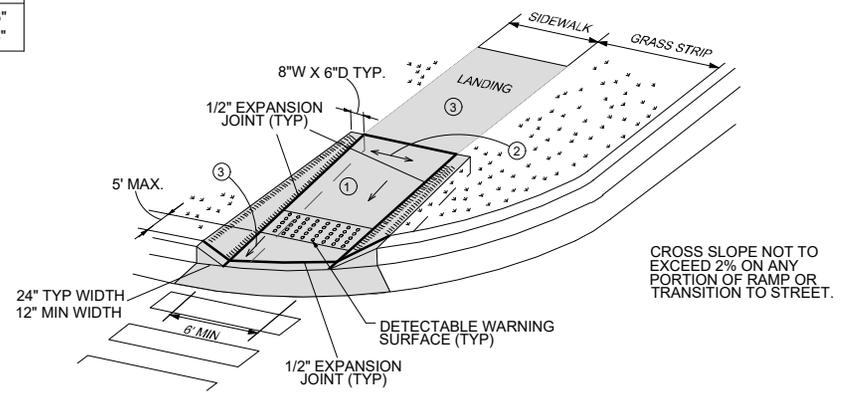


**TYPE N -1A (FLARE TYPE)**

NOTE: USE SMALL FLARES ONLY WHEN A CURB TYPE DIRECTLY CONFLICTS WITH APPROACHING VEHICULAR TURNING MOVEMENTS.

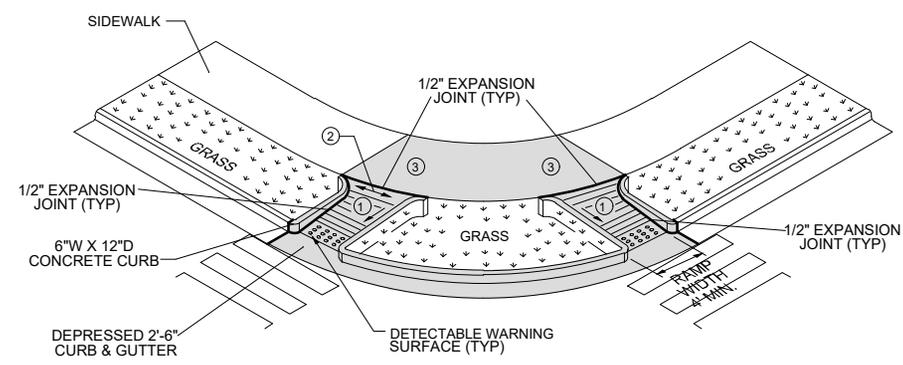

**TYPE N -2 (RADIUS)**

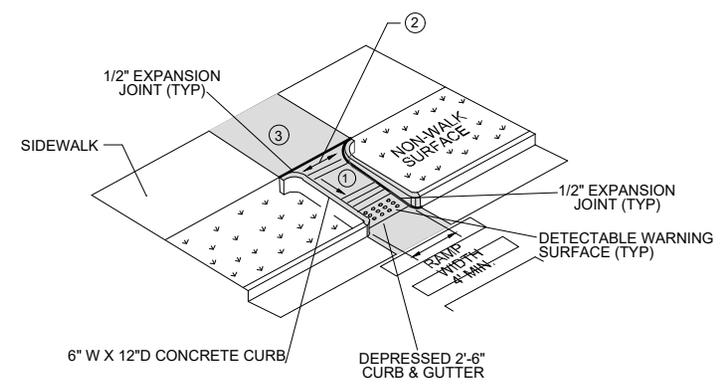

**TYPE N - (TEE INTERSECTION)**

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

- ① 8.33% (12:1) MAX RAMP SLOPE
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.

PAY LIMITS FOR CURB RAMP



**TOWN OF INDIAN TRAIL  
STANDARD DETAIL  
  
CURB RAMPS  
(NEW DEVELOPMENT)**

REVISIONS	Scale Not To Scale
	Revision Date 02/2021
	Detail # T_16.02