


PAY LIMITS FOR CURB RAMP

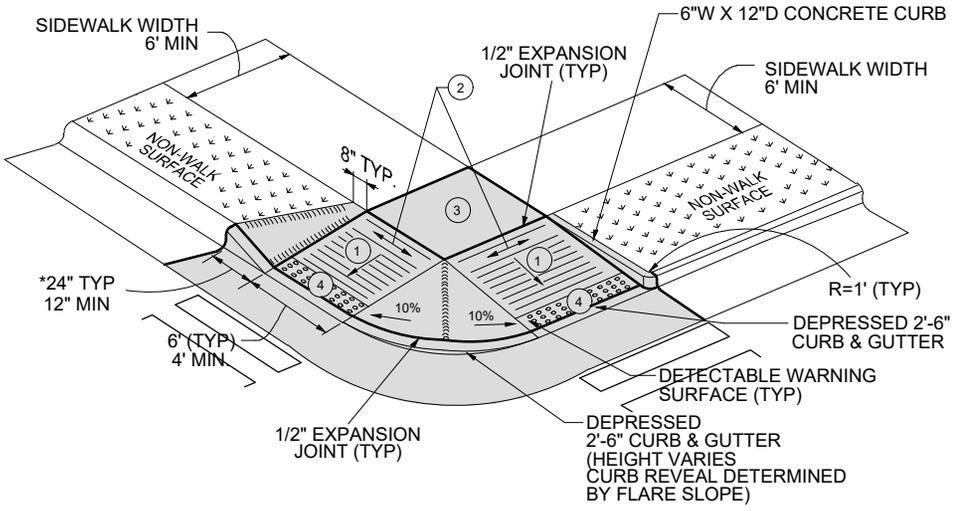

| CONCRETE DEPTH | |
|----------------|----|
| RAMP / FLARE | 6" |
| LANDING | 4" |

- ① 8.33% (12:1) MAX RAMP SLOPE
- ② CROSS SLOPE: 2.00%
- ③ CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.
- ④ RAMPS AND DOMES SHALL BE INSTALLED THE SAME WIDTH AS THE SIDEWALK.

NOTE: * USE SMALL FLARE ONLY WHEN A CURB WOULD DIRECTLY CONFLICT WITH APPROACHING VEHICLE TURNING MOVEMENTS.



TOWN OF INDIAN TRAIL
STANDARD DETAIL

CURB RAMPS
(NEW DEVELOPMENT)

| REVISIONS | Scale |
|-----------|---------------|
| | Not To Scale |
| | Revision Date |
| | 02/2021 |
| | Detail # |
| | T_16.03 |