



7' PARABOLIC SECTION

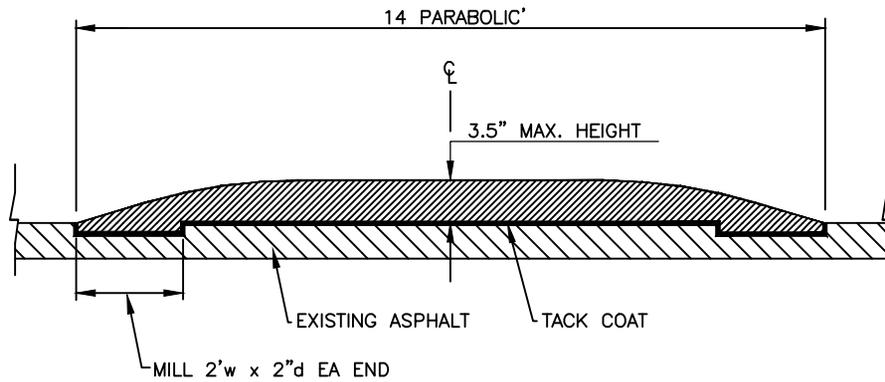

SECTION A-A

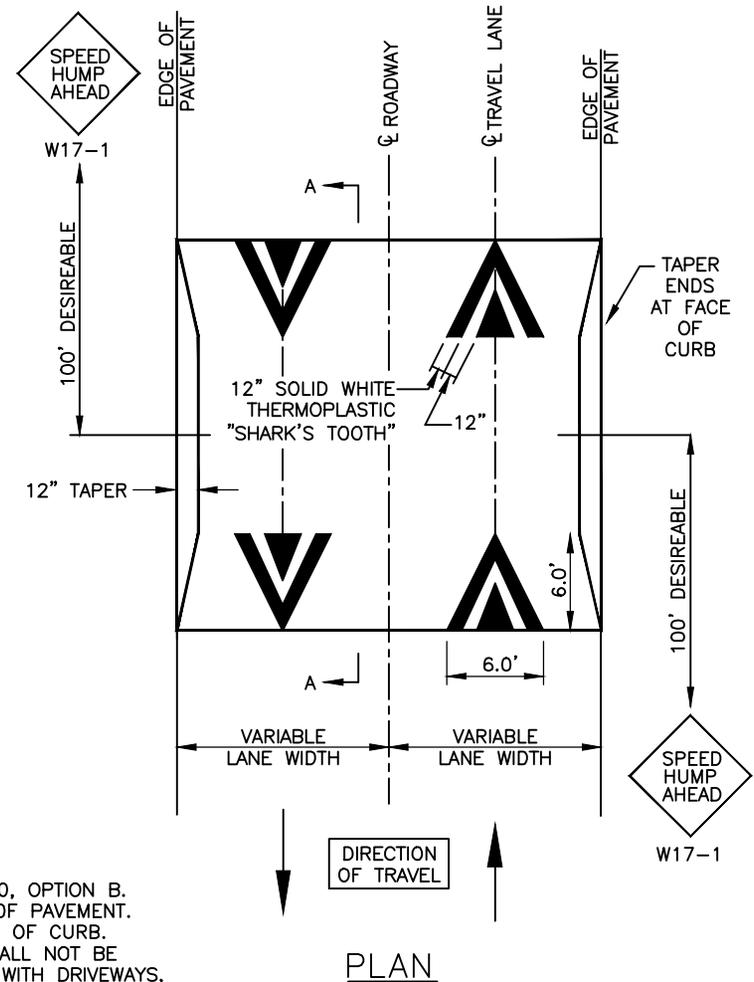

DIRECTION OF TRAVEL

PLAN

NOTES:

1. SPEED HUMP TO BE CONSTRUCTED OF APPROVED NCDOT ASPHALT SURFACE COURSE MATERIAL.
2. PAVEMENT MARKINGS SHALL BE THERMOPLASTIC PER NCDOT SPECIFICATIONS. USE MUTCD FIG. 3B-30, OPTION B.
3. WHEN PLACED ON ROADWAY WITH NO CURB & GUTTER, EDGE OF SPEED HUMP EXTENDS TO EDGE OF PAVEMENT.
4. WHEN PLACED ON ROADWAY WITH CURB & GUTTER, EDGE OF SPEED HUMP TO BE PLACED AT EDGE OF CURB.
5. SPEED HUMP LOCATIONS WILL BE DETERMINED BY THE DIRECTOR OF ENGINEERING. SPEED HUMP SHALL NOT BE PLACED OVER MANHOLES, WATER VALVES, SURVEY MONUMENTS, JUNCTION CHAMBERS, IN CONFLICT WITH DRIVEWAYS, OR ADJACENT TO FIRE HYDRANTS.



TOWN OF INDIAN TRAIL
STANDARD DETAIL

14' PARABOLIC SPEED HUMP

REVISIONS	Scale
	Not To Scale
	Revision Date
	02/2021
	Detail #
	T_20.01